

Compact filter

Airpac ePM10 65%

APPLICATIONS


- Medium filtration for air handling units and prefiltration for (H)EPA filters
- Pre-filter for Cleanroom application

ADVANTAGES

- Compact and lightweight
- Large filter surface for a long service life
- High filter efficiency
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Minipleat fiberglass paper, Frame: Polystyrene plastic or galvanized steel
- Seal: Polyurethane, Spacers: Hot-melt cord, Flange thickness: 25 mm.
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

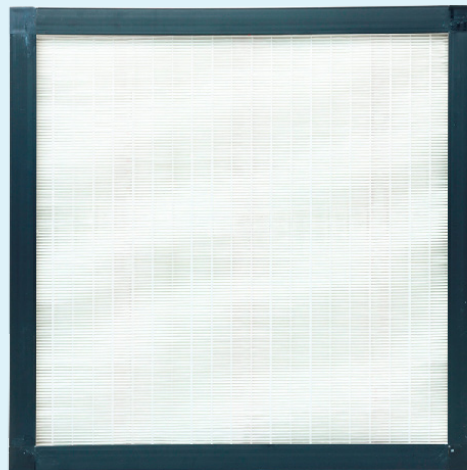

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	INCH SIZE	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	100		ePM10 65%	M5	846	130	
	287	592	100		ePM10 65%	M5	1745	130	
	490	592	100		ePM10 65%	M5	2980	130	
	592	592	100		ePM10 65%	M5	3600	130	

Alternative sizes on request

Compact filter

Airpac ePM1 65%

APPLICATIONS


- Fine filtration in air handling units with pre-filtration
- Pre-filter for Cleanroom application

ADVANTAGES

- Compact and lightweight
- Large filter surface for a long service life
- High filter efficiency
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Minipleat fiberglass paper, Frame: Polystyrene plastic or galvanized steel
- Seal: Polyurethane, Spacers: Hot-melt cord, Flange thickness: 25 mm.
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 70° Celsius
- Maximum relative humidity: 100%

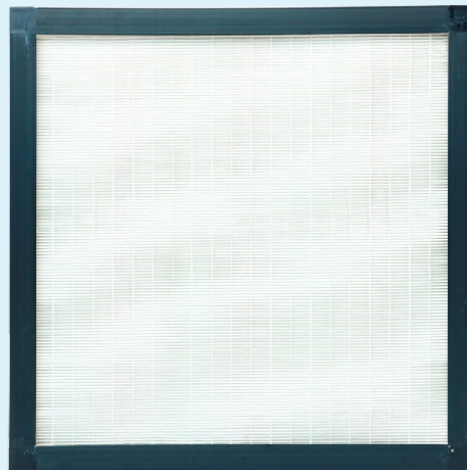

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	INCH SIZE	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	100		ePM1 65%	F7	846	150	
	287	592	100		ePM1 65%	F7	1745	150	
	490	592	100		ePM1 65%	F7	2980	150	
	592	592	100		ePM1 65%	F7	3600	150	

Alternative sizes on request

Compact filter

Airpac ePM1 85%

APPLICATIONS


- Fine filtration in air handling units with pre-filtration
- Pre-filter for Cleanroom application

ADVANTAGES

- Compact and lightweight
- Large filter surface for a long service life
- High filter efficiency
- Eurovent certified through the manufacturer

SPECIFICATIONS

- Media: Minipleat fiberglass paper, Frame: Polystyrene plastic or galvanized steel
- Seal: Polyurethane, Spacers: Hot-melt cord, Flange thickness: 25 mm.
- Recommended final resistance: 250 Pa
- Maximum continuous temperature: 50° Celsius
- Maximum relative humidity: 70%

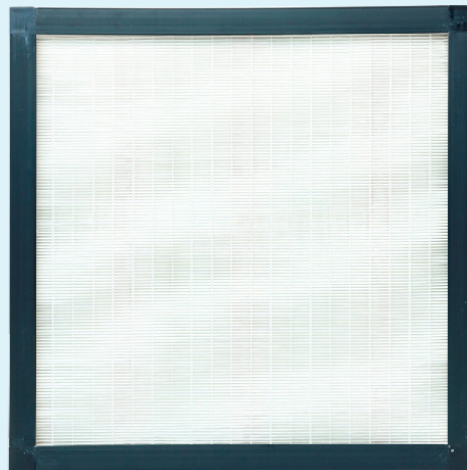

ARTICLE NUMBER	WIDTH MM.	LENGTH MM.	THICKNESS MM.	INCH SIZE	ISO 16890	EN 779	FLOW RATE M3/H	INITIAL RESISTANCE	ENERGY USAGE
	287	287	100		ePM1 85%	F9	846	185	
	287	592	100		ePM1 85%	F9	1745	185	
	490	592	100		ePM1 85%	F9	2980	185	
	592	592	100		ePM1 85%	F9	3600	185	

Alternative sizes on request